



for 1/4 inch thick


**TRACK ASSEMBLY No 8**

glass, acrylic, pegboard,  
fiber board, plywood, etc.

- Silent, smooth operation
- Economical and quick install
- Extruded Aluminum

**PACKAGE CONTAINS:**

- 1 pc. #3314 upper guide
- 1 pc. #314 lower track
- Screws

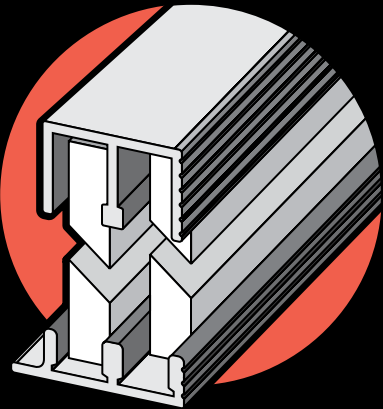


for 1/4 inch thick bypassing doors

[www.epcohardware.com](http://www.epcohardware.com)


**PART IDENTIFICATION:**

1 pc. #3314 upper guide



The serrated face bottom track and upper guide are designed to provide an attractive finished frame.

1 pc. #314 lower track




To obtain the best sliding qualities, apply a light coat of wax on bottom track twice a year.

**CAUTION:** Do not paint track or guide on sliding surface.



[www.epcohardware.com](http://www.epcohardware.com)

**SURFACE INSTALLATION**

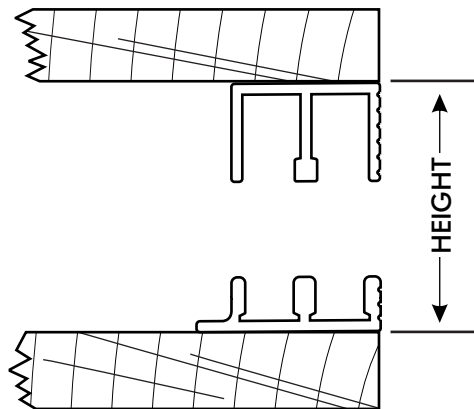

**TO OBTAIN PANEL HEIGHT**

Cut panel 7/16" less than height of finished opening.

**TO OBTAIN PANEL WIDTH**

Add 1/2" to opening width and divide by 2 for 1/2" overlap.

Add 1" to opening width and divide by 2 for 1" overlap.

Use screws to fasten track and guide to mounting surface.